

INTEGRAL TWIN

2944UAP150R26-28S30 D RAL9002 4XM8

EAN 4031582462180



BETTER MOBILITY. BETTER LIFE.



Image may differ from the original product

PERFORMANCE

Roll performance	● ● ● ● ●
Movement noise	● ● ● ○ ○
Attrition	● ● ● ● ○
Corrosion resistance	● ● ● ○ ○

CORE ATTRIBUTES

Product name	Integral twin
Housing type	Swivel castor with central, total or directional lock
Standard	similar EN12531- Hospital Bed Castors
Load capacity at 3 km/h	150 kg
Load capacity at 4 km/h	150 kg
Load capacity Static	300 kg
Temperature range (Minimum)	-30 °C
Temperature range (Maximum)	80 °C
Overall height	175 mm
Overall width	73 mm
Overall weight	1.44 kg
Certification	Tested and monitored by TÜV Süd

WHEEL

Body material	Polyamide
Tread material	Polyurethane, injected
Bearing	Precision ball bearing
Threadguards	With threadguard
Diameter	150 mm
Tread width	15 mm
Hardness of tread (D)	40 Shore D

HOUSING

Material fork	Steel sheet, medium
Fork shape	Twin wheel housing
Swivel bearing	Precision ball bearing
Offset	45 mm
Swivel radius	124 mm
Swivel interference	248 mm

FITTING

Fitting type	Stem with cam hole for profile bars
Bolt diameter	28 mm
Bolt length	96 mm



German Design Award



Red Dot Design Award

INTEGRAL TWIN


2944UAP150R26-28S30 D RAL9002 4XM8

EAN 4031582462180



BETTER MOBILITY. BETTER LIFE.

TECHNICAL DRAWINGS

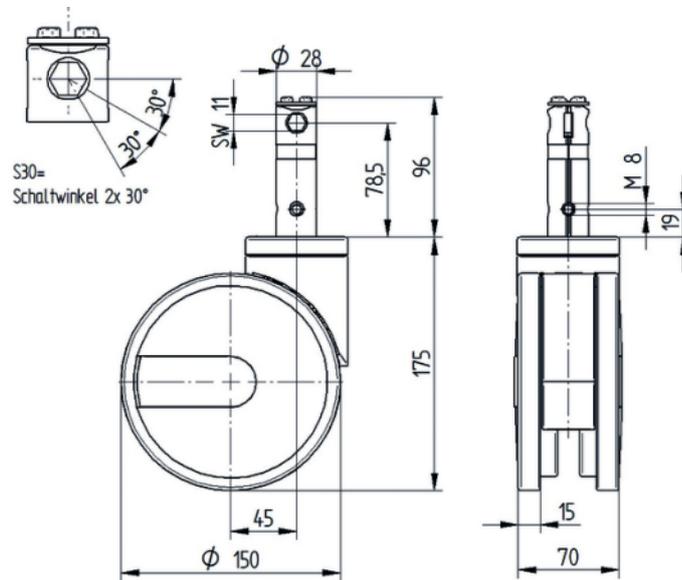

German
Design
Award



Red Dot
Design
Award