

# PRODUCT INFORMATION

## INTEGRAL TWIN

 125 - 250 kg     129 - 193 mm     100 - 150 mm



**TENTE**

BETTER MOBILITY. BETTER LIFE.

# INTEGRAL TWIN

Full choice of customisable product solutions.



## HOUSINGS

Pages: 6-11



## WHEELS

Page: 12-17



## FITTINGS

Pages: 18-21

# INTEGRAL TWIN LOAD

Castor for loads up to 250 kg and high torsional stiffness.



## INTEGRAL TWIN LOAD

Pages: 22-25

# INTEGRAL TWIN TORSION

Castor with high torsional stiffness.



## INTEGRAL TWIN TORSION

Pages: 26-29

# MOBILITY FROM THE WORLD MARKET LEADER

TENTE believes in smart mobility solutions which noticeably improve people's lives and their working environment. As the world market leader in hospital bed castors, we have developed many customer-focussed solutions which increase productivity, ensure safety and open up new horizons in matters of design, durability as well as environmental friendliness. Leading manufacturers and companies of different industries rely on these competencies and our high production quality.

On the following pages you will find technical information about our Integral twin product family. We will also demonstrate the added value this mobility solution offers to your organisation. Features include:

## **Optimised manoeuvrability**

Twin wheel castor with high manoeuvrability due to differential effect.

## **Quite and smooth actuation**

Very low actuation forces ensure smooth and quiet operation.

## **Quality made in Germany**

For decades continuously optimized to customer requirements.



# INTEGRAL TWIN



# FEATURES



## Optimised manoeuvrability

Twin wheel castor with high manoeuvrability due to differential effect.



## Award-winning design

Awarded with prestigious prizes by international juries.



## Certified safety

TÜV Süd certified performance standard.



## Permanent washability

Optional versions with all metal components made of stainless steel.



## Chemical-resistant components

Resistant to many cleaning agents and chemical substances.



## Colour matching


Colours can be adapted to match the product design. Standard colours:

 RAL 9002



## Non-hazardous materials

Non hazardous materials are used in order to comply with the RoHS directive and REACH regulation of the European Union. These do not contain polycyclic aromatic hydrocarbons or chromium (VI).



## Strong stand

Optional: High torsional stiffness ensures that operating tables or heavy applications have a secured stand.



## Individual branding

Can be printed with a logo.

# HOUSINGS



# FEATURES




## Optimised steering mechanism

Directional lock for improved steering around corners, as well as moving in a straight line for long distances.



## User-friendly central lock

Simultaneous locking of more than one castor using a central actuation lever.



## Practical system solution

Practical system solution with all technical components for central locking.



## Easy steering

Precision ball bearing in swivel head.



## Strong construction

The inner fork made of pressed steel or pressed stainless steel carries the main load.



## Multistage switching function

Up to three locking positions: directional lock, total lock or free mobility.



## Extremely strong construction

Optional: Load bearing welded steel housing for heavy load.



## Reduced cleaning

Castors are quick and easy to clean thanks to their mainly smooth surfaces.



## Secured stand

Total lock for simultaneously locking the wheel and swivel housing.

# HOUSINGS

The frame is made of pressed steel, with precision ball bearing in swivel head and wheel. The housing cover is made of synthetic materials and stem with cam hole for profile bars. These castors are quick and easy to clean thanks to their mainly smooth surfaces.

## Central total lock

Simultaneous locking of the wheel and swivel bearing for secure standing with more than one castor.



## Central total and directional lock

User-friendly central lock for simultaneous locking of more than one castor. Combined directional lock for improved steering around bends, as well as movement in a straight line over long distances. Total lock for simultaneously locking the wheel and swivel bearing to allow for secure standing.



## Wide range

Find castors with high torsional stiffness on page 22 and 26. Castors with high load capacity on page 22.



## Standard colour:

● RAL 9002

Other colours on request.

The materials are tested in our own laboratory for compliance with European standards. Non hazardous materials are used in order to comply with the RoHS directive and REACH regulation of the European Union. These do not contain polycyclic aromatic hydrocarbons or chromium (VI). All components are resistant to many cleaning agents and chemical substances.

**Swivel castor**

Wheel and housing are free to move for an easy manoeuvrability.



**TÜV certified**

The performance standard of these castors even surpasses the requirements of the regulations set out in European standard DIN EN 12531.



**Integrated cable protection**

To protect lying cables on the floor and to avoid interruptions during transportation, we offer for this castors an integrated cable pusher already mounted ex works.


## Standard castors



 <b>Description</b>	<b>Housing type</b>	Swivel castor	Swivel castor with central total or directional lock	Swivel castor with central total lock
	<b>Article description</b>	2940	2944	2946
	<b>Frame material</b>	Pressed steel	Pressed steel	Pressed steel
	<b>Housing cover material</b>	Synthetic	Synthetic	Synthetic
	<b>Swivel bearing</b>	Precision ball bearing	Precision ball bearing	Precision ball bearing
	<b>High torsional stiffness</b>	-	-	-
	<b>Washable</b>	-	-	-
 <b>Swivel interference</b>	<b>Wheel <math>\varnothing</math> 100 mm</b>	162 mm	162 mm	162 mm
	<b>Wheel <math>\varnothing</math> 125 mm</b>	200 mm	200 mm	200 mm
	<b>Wheel <math>\varnothing</math> 150 mm</b>	240 mm	240 mm	240 mm

Items with this sign "-" are not available in our standard range. Please contact us.

### Swivel bearing



Precision ball bearing for best manoeuvrability.

## Washable castors




 <b>Description</b>	<b>Housing type</b>	Swivel castor with central total or directional lock	Swivel castor with central total lock
	<b>Article description</b>	7944	7946
	<b>Frame material</b>	Pressed stainless steel	Pressed stainless steel
	<b>Housing cover material</b>	Synthetic	Synthetic
	<b>Swivel bearing</b>	Precision ball bearing	Precision ball bearing
	<b>High torsional stiffness</b>	-	-
	<b>Washable*</b>	●	●
 <b>Swivel interference</b>	<b>Wheel Ø 100 mm</b>	162 mm	162 mm
	<b>Wheel Ø 125 mm</b>	200 mm	200 mm
	<b>Wheel Ø 150 mm</b>	240 mm	240 mm

Items with this sign "●" are available. Items with this sign "-" are not available in our standard range. Please contact us.

\* Washable versions with sealed wheel bearings or complete washable versions with pressed stainless steel housings, sealed or stainless steel wheel bearings. Washable castors must be sealed in the fitting area by the customer.

### Swivel bearing



Precision ball bearing for best manoeuvrability.

# WHEELS




# FEATURES




## Certified conductivity

Optional: Conductive version to protect users and electrical devices from electrostatic discharge.



## Comfortable manoeuvrability

Outstanding swivel and rolling properties due to optimised tread geometry and material selection.



## Non-staining operation

Non-staining on contact with floors during long standing periods.



## Protective seal

Optional: Wheels with sealed bearings to protect against spray water and dirt.



## Non-marking movement

Wheels with reduced abrasion and little cleaning requirement.

# WHEELS

The ideal combination of precision ball bearings, polyurethane treads and wheels with excellent geometry ensures outstanding manoeuvrability and minimal force required to push your application. Durability, stability and washability are basic requirements.



## Maxtech

Perfect for functional design, injection-moulded polyurethane. Extremely hard-wearing and hygienic. There's also an optional washable version with a sealed precision ball bearing.



## Maxtech conductive


Polyurethane with certified conductivity to protect users and electrical devices against electrostatic discharge. These castors have a yellow dot on the clip as standard so they can be easily identified.

The materials are tested in our own laboratory for compliance with European standards. Non hazardous materials are used in order to comply with the RoHS directive and REACH regulation of the European Union. These do not contain polycyclic aromatic hydrocarbons or chromium (VI). All components are insensitive to many cleaning agents and chemical substances. Castors have smooth surfaces that are quick and easy to clean.



• **Supratech**  
Extremely versatile with a smooth-running thermoplastic rubber tread.

## Technical data and availability

					
<b>Description</b>	<b>Product name</b>	Maxtech	Maxtech	Maxtech stainless	Maxtech conductive
	<b>Article description</b>	UAP	UAX	UAC	USC
	<b>Tread material</b>	Polyurethane	Polyurethane	Polyurethane	Polyurethane
	<b>Tread hardness</b>	Shore D 42	Shore D 42	Shore D 42	Shore D 42
	<b>Wheel body material</b>	Polyamide	Polyamide	Polyamide	Polyamide
	<b>Temperature range</b>	-30 °C / +80 °C	-30 °C / +80 °C	-30 °C / +80 °C	-30 °C / +80 °C
	<b>Width of tread / wheel diameter in mm</b>	15 mm / Ø 100 12 mm / Ø 125 15 mm / Ø 150	15 mm / Ø 100 12 mm / Ø 125 15 mm / Ø 150	- - 15 mm / Ø 150	15 mm / Ø 100 12 mm / Ø 125 -
	<b>Electric conductive (10<sup>4</sup> OHM)</b>	-	-	-	●
	<b>Washable*</b>	-	-	●	●
<b>Bearing type</b>	<b>Plain bearing</b>	-	-	-	-
	<b>Roller bearing</b>	-	-	-	-
	<b>Cone ball bearing</b>	-	-	-	-
	<b>Precision ball bearing</b>	●	● Sealed	● Stainless steel	● Stainless steel
<b>Load capacity**</b>	<b>Wheel Ø 100 mm</b>	125 kg	125 kg	-	125 kg
	<b>Wheel Ø 125 mm</b>	125 kg	125 kg	-	125 kg
	<b>Wheel Ø 150 mm</b>	150 kg	150 kg	150 kg	-

Items with this sign "●" are available. Items with this sign "-" are not available in our standard range. Please contact us.

The mentioned load capacity is only valid for the Integral twin castors.

\* Washable versions with sealed wheel bearings or complete washable versions with pressed stainless steel housings, sealed or stainless steel wheel bearings.

Washable castors must be sealed in the fitting area by the customer.

\*\* Load capacity according to DIN 12531.

Maxtech conductive	Maxtech conductive
USP	USX
Polyurethane	Polyurethane
Shore D 42	Shore D 42
Polyamide	Polyamide
-30 °C / +80 °C	-30 °C / +80 °C
15 mm / Ø 100 12 mm / Ø 125 15 mm / Ø 150	15 mm / Ø 100 12 mm / Ø 125 15 mm / Ø 150
●	●
-	●
-	-
-	-
-	-
●	● Sealed
125 kg	125 kg
125 kg	125 kg
150 kg	150 kg

#### Bearing types



Precision ball bearing for highest performance.



#### Load capacity

The load capacity depends on the housing and wheel. It has been tested and fulfills the requirements according to EN 12531 at a speed of 4 km/h. When using four castors, you can calculate the necessary load capacity as follows: The sum of the weight of your application plus the additional load divided by three castors.

$$\frac{\text{Weight of application} + \text{load}}{3} = \text{Load capacity of one castor}$$

# FITTINGS



# FEATURES



## Fast assembly

Faster assembly thanks to easy quick fitting solution.



## Highly customisable

Switching angles, brake and actuation forces are adaptable to your needs.



## Quite and smooth actuation

Little effort and noise needed to activate castors - which ensures a quiet and smooth use.



## Tested quality

Tested in our own test laboratory for compliance with European standards.



## Low overall height

Reduced risk of injury and enhanced patient safety due to short fitting options.

# SOLID STEM FITTINGS

For an easy mounting into tubes we offer different solid stem fittings. You can choose between different sizes and locking functions. The stems are highly customisable. Very low actuation forces ensure smooth and quiet operation. In addition to the standard way of assembly, we also offer a special fitting type for fast assembly.

## Stems with central locking function

Choose between central total lock or central total and directional lock. Very low actuation forces ensure smooth and quiet operation. The switching angles, brake and actuation forces are adaptable to your needs. Contact us.

**Cam hole**  
To connect the castors by profile bars.

**QUIET & SMOOTH ACTUATION**



## Quick fitting

Save assembly time and material costs with a stem with octagonal profile. Fitting screws are not necessary. The octagonal profile just needs to fit to the octagonal profile at the frame.

**Thread**  
For safe fixation with screws.

## Solid stem

Easy mounting in tubes. For a long-lasting use, the stem is bright zinc plated and blue passivated.




## Technical data and availability

						
<b>i</b> <b>Description</b>	<b>Fitting type</b>	Solid stem	Stem with central total lock or central total and directional lock	Solid stem	Stem with central total lock or central total and directional lock	Stem with central total lock or central total and directional lock
	<b>Article description</b>	R05-28	R26-28	R05-32	R36-32	R36-34
	<b>Shape</b>	Round	Round	Round	Round	Round with octagonal profile
	<b>Thread for fixation screw</b>	M8	4 x M8	M6	4 x M6	-
	<b>Thread position from bottom</b>	19 mm	19 mm	7 mm	7 mm	-
	<b>Solid stem <math>\phi</math></b>	28 mm	28 mm	32 mm	32 mm	32 mm
	<b>Solid stem length</b>	45 mm	96 mm	45 mm	50 mm	51 mm
	<b>Shifting angles for actuation forces</b>	-	30° or 45°	-	30° or 45°	30° or 45°
	<b>Spring type for brake force</b>	-	Soft, standard or hard	-	Soft, standard or hard	Soft, standard or hard
<b>Overall height</b>	<b>Wheel <math>\phi</math> 100 mm</b>	129 mm	129 mm	129 mm	129 mm	129 mm
	<b>Wheel <math>\phi</math> 125 mm</b>	150 mm	150 mm	150 mm	150 mm	150 mm
	<b>Wheel <math>\phi</math> 150 mm</b>	175 mm	175 mm	175 mm	175 mm	175 mm


Items with this sign "-" are not available in our standard range. Please contact us.

### Technical drawings


R05-28




R26-28




R05-32



R36-32



R36-34



# INTEGRAL TWIN LOAD



# INTEGRAL TWIN LOAD

This castor has the same characteristics as the Integral twin, but with high torsional stiffness and high load up to 250 kg. This extreme torsional stiffness ensures that operating tables or heavy applications have a secure stand.

## Housing versions



Description	Housing type	Swivel castor with central total or directional lock	Swivel castor with central total lock
	Article description	3944	3946
	Frame material	Welded, reinforced steel	Welded, reinforced steel
	Housing cover material	Synthetic	Synthetic
	Swivel bearing	Double precision ball bearings	Double precision ball bearings
	High torsional stiffness	●	●
	Washable	-	-
Swivel interference	Wheel Ø 100 mm	-	-
	Wheel Ø 125 mm	-	-
	Wheel Ø 150 mm	240 mm	240 mm



**Standard colour:**

● RAL 9002

Other colours on request.

Items with this sign "●" are available. Items with this sign "-" are not available in our standard range. Please contact us.



### Extremely strong construction

Castors with a wheel diameter of 150 mm have double precision ball bearings in the swivel head and wheel, with a reinforced, welded steel housing for a higher load capacity of 250 kg as well as high torsional stiffness.

## Wheel version



Description	Product name	Maxtech load
	Article description	UAP
	Tread material	Polyurethane
	Tread hardness	Shore D 42
	Wheel body material	Polyamide
	Temperature range	-30 °C / +80 °C
	Width of tread	15 mm
	Electric conductive (10 <sup>4</sup> OHM)	-
Bearing type	Plain bearing	-
	Roller bearing	-
	Cone ball bearing	-
	Precision ball bearing	● Two, stainless steel
Load capacity*	Wheel Ø 100 mm	-
	Wheel Ø 125 mm	-
	Wheel Ø 150 mm	250 kg



### Load capacity

The load capacity depends on the housing and wheel. It has been tested and fulfills the requirements according to EN 12531 at a speed of 4 km/h. When using four castors, you can calculate the necessary load capacity as follows: The sum of the weight of your application plus the additional load divided by three castors.

$$\frac{\text{Weight of application} + \text{load}}{3} = \text{Load capacity of one castor}$$

Items with this sign "●" are available. Items with this sign „-“ are not available in our standard range. Please contact us.

The mentioned load capacity is only valid for the Integral twin load castors.

\* Load capacity according to DIN 12531.

## Fitting version



Description	 <b>Fitting type</b>	Solid stem with central total and directional lock
	<b>Article description</b>	R36-32
	<b>Shape</b>	Round
	<b>Thread for fixation screw</b>	4 x M6
	<b>Thread position from bottom</b>	7 mm
	<b>Solid stem <math>\varnothing</math></b>	32 mm
	<b>Solid stem length</b>	50 mm
	<b>Shifting angles for actuation forces</b>	30° or 45°
	<b>Spring type for brake force</b>	Soft, standard or hard
Overall height	 <b>Wheel <math>\varnothing</math> 100 mm</b>	-
	<b>Wheel <math>\varnothing</math> 125 mm</b>	-
	<b>Wheel <math>\varnothing</math> 150 mm</b>	193 mm

Items with this sign "-" are not available in our standard range. Please contact us.


**Cam hole**  To connect the castors by profile bars.

**Solid stem**  Easy mounting in tubes.

**Thread**  For safe fixation with screws.

### Technical drawing

R36-32



# INTEGRAL TWIN TORSION



# INTEGRAL TWIN TORSION

This castor has the same characteristics as the Integral twin, but with high torsional stiffness. This extreme torsional stiffness ensures that operating tables have a secure stand.

## Housing versions



Description	Housing type	Swivel castor with central total or directional lock	Swivel castor with central total lock
	Article description	3944	3946
	Frame material	Welded, reinforced steel	Welded, reinforced steel
	Housing cover material	Synthetic	Synthetic
	Swivel bearing	Precision ball bearing	Precision ball bearing
	High torsional stiffness	●	●
	Washable*	●	●
Swivel interference	Wheel Ø 100 mm	-	-
	Wheel Ø 125 mm	200 mm	200 mm
	Wheel Ø 150 mm	-	-

Items with this sign "●" are available. Items with this sign "-" are not available in our standard range. Please contact us.

\* Washable versions with stainless steel bearings. Washable castors must be sealed in the fitting area by the customer.



**Standard colour:**

● RAL 9002

Other colours on request.

## Wheel version



		Maxtech stainless	Maxtech conductive
		Description	
i	Product name	Maxtech stainless	Maxtech conductive
	Article description	UAC	UAP
	Tread material	Polyurethane	Polyurethane
	Tread hardness	Shore D 40	Shore D 42
	Wheel body material	Polyamide	Polyamide
	Temperature range	-30 °C / +80 °C	-30 °C / +80 °C
	Width of tread	12 mm	15 mm
	Electric conductive (10 <sup>4</sup> OHM)	●	●
	Washable*	●	●
Bearing type	Plain bearing	-	-
	Roller bearing	-	-
	Cone ball bearing	-	-
	Precision ball bearing	● Two, stainless steel	● Two, stainless steel
Load capacity*	Wheel Ø 100 mm	-	-
	Wheel Ø 125 mm	125 kg	125 kg
	Wheel Ø 150 mm	-	-

Items with this sign "●" are available. Items with this sign "-" are not available in our standard range. Please contact us. The mentioned load capacity is only valid for the Integral twin torsion castors.

\* Load capacity according to DIN 12531.



### Load capacity

The load capacity depends on the housing and wheel. It has been tested and fulfills the requirements according to EN 12531 at a speed of 4 km/h. When using four castors, you can calculate the necessary load capacity as follows: The sum of the weight of your application plus the additional load divided by three castors.

$$\frac{\text{Weight of application} + \text{load}}{3} = \text{Load capacity of one castor}$$

## Fitting version




Description	 <b>Fitting type</b>	Solid stem with central total and directional lock
	<b>Article description</b>	R36-32
	<b>Shape</b>	Round
	<b>Thread for fixation screw</b>	4 x M6
	<b>Thread position from bottom</b>	7 mm
	<b>Solid stem <math>\varnothing</math></b>	32 mm
	<b>Solid stem length</b>	50 mm
	<b>Shifting angles for actuation forces</b>	30° or 45°
	<b>Spring type for brake force</b>	Soft, standard or hard
Overall height	 <b>Wheel <math>\varnothing</math> 100 mm</b>	-
	<b>Wheel <math>\varnothing</math> 125 mm</b>	150 mm
	<b>Wheel <math>\varnothing</math> 150 mm</b>	-

Items with this sign "-" are not available in our standard range. Please contact us.

- Cam hole**  
For profile bars to centrally lock the castor.
- Solid stem**  
Easy mounting in tubes.
- Thread**  
For safe fixation with screws.

### Technical drawing

R36-32




# ACCESSORIES FOR CENTRAL LOCKING

Our central locking components offer a practical solution for your needs. Please contact us for further advice.



## Change lever

To connect the transmission bar from the foot end to the head end. It is available in three different sizes.

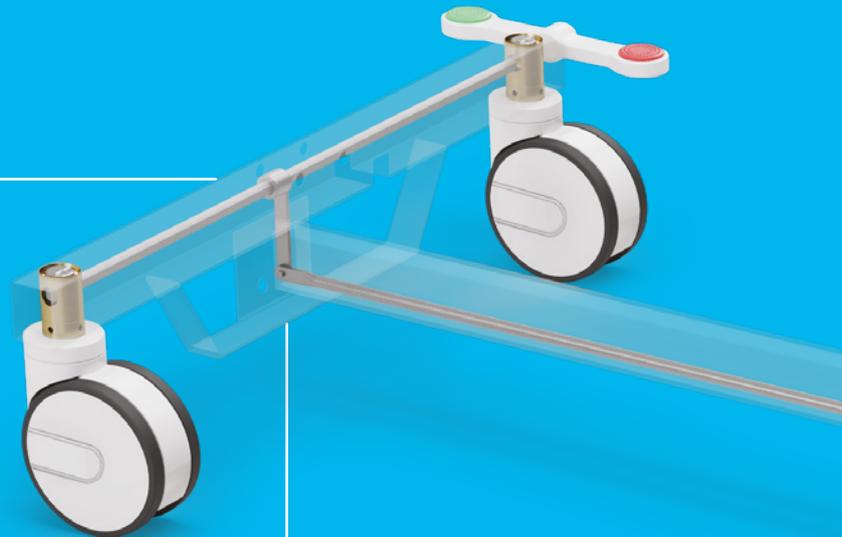


## Bearing guide



**Profile bar**

Available in different lengths,  
on request.



**TENTE lever**

All change levers will be delivered  
with a stainless steel screw. They are  
available as a single or double lever  
for the right and left side. Plugs are  
available in different colours.



**Optional: adaptor for customer levers**

This round adaptor accepts customer  
made levers.


# TECHNICAL DATA

## ACCESSORIES

### Profile bar



i	<b>Article description</b>	Profile bar
	<b>Wrench size</b>	11
	<b>Material</b>	Zinc-plated steel
	<b>Length</b>	On request



### TENTE levers



i	<b>Change lever type</b>	Double lever	Lever	Lever
	<b>Article description</b>	Double lever	Lever	Lever 180
	<b>Compatible with product</b>	30° or 45°	30° or 45°	30° or 45°
	<b>Material</b>	Fibreglass-reinforced polyamide	Fibreglass-reinforced polyamide	Fibreglass-reinforced polyamide
	<b>Version</b>	Left version Right version	Left version	Right version
	<b>Width</b>	41,5 mm	41,5 mm	41,5 mm
	<b>Length</b>	191,5 mm	95,75 mm	95,75 mm


**Standard lever colours**  
More colours on request.

- RAL 7035
- Eloxal silver


**Standard plug colours**  
More colours on request.

- RAL 6016
- RAL 3016
- RAL 9011


Double lever



Lever, left version




Lever 180, right version



## Adaptor for customer levers




i	Article description	Adaptor
	Wrench size	11
	Material	Zinc die cast



## Bearing guide



i	Article description	Bearing guide
	Wrench size	11
	Material	Zinc die cast




## Change lever




i	Article description	Change lever	Change lever	Change lever
	Wrench size	11	11	11
	Material	Zinc die cast	Zinc die cast	Zinc die cast
	Length	24 mm	28 mm	65 mm


Change lever 24 mm length



Change lever 28 mm length



Change lever 65 mm length



# DIVERSITY WITH A SYSTEM

## OUR CASTORS

All of our products have their own specific qualities and strengths. Whether it's high design standards, specialist applications or exceptional load capacities – our range can meet your needs and can be adapted to fit different models.

From the correct dimensions and technical specifications to the required configuration, our product families are able to offer the ideal solution – whatever you need. Contact us for more information or visit our website: [www.tente.com](http://www.tente.com)

E-Drive



⌀ 125 mm

Alpha



⊃ 70 - 500 kg  
⌀ 80 - 200 mm

Delta



⊃ 300 - 600 kg  
⌀ 125 - 200 mm

Delta twin



⊃ 600 - 750 kg  
⌀ 125 - 200 mm

Zeta



⊃ 300 - 800 kg  
⌀ 125 - 250 mm

Kappa




⊃ 300 - 2.000 kg  
⌀ 80 - 300 mm

Kappa flex



⊃ 360 - 750 kg  
⌀ 160 - 200 mm

Omikron



⊃ 900 - 11.000 kg  
⌀ 100 - 500 mm

Radiata



1.200 - 1.500 kg  
80 mm

Scout



150 - 350 kg  
160 - 200 mm

Integral



100 - 150 kg  
100 - 200 mm

Integral twin



125 - 250 kg  
100 - 150 mm

Linea clinic



150 - 200 kg  
125 - 150 mm

Aviana care



100 kg  
75 mm

Aviana



75 mm

Agila



40 - 100 kg  
50 - 150 mm

Agila twin



50 - 100 kg  
50 - 75 mm

Stora



60 - 160 kg  
75 - 160 mm

Mono



30 - 70 kg  
50 - 100 mm

Galea



60 - 100 kg  
100 - 125 mm

Levina



60 - 100 kg  
75 - 150 mm

Linea



40 - 150 kg  
50 - 150 mm

Anika



40 - 50 kg  
55 - 75 mm

Lumina



30 - 100 kg  
35 - 75 mm

Stylea



40 - 100 kg  
35 - 100 mm

Smiles



40 kg  
50 mm

Compacta



10 - 55 kg  
14 - 50 mm

# EXPERTISE THAT INSPIRES

## CONTACT US

We are a globally operating company supporting you on five continents. This means on-site support with service on a level playing field – along with in-depth knowledge. Additionally, our solution experts will advise you on the best mobility concept for your needs. Go here to find your nearest TENTE location: [www.tente.com/locations](http://www.tente.com/locations)

## INCREASE YOUR EFFICIENCY

Our intelligent mobility solutions help you save time, effort, energy, and operating expenses. This allows you to improve your operating methods and working conditions, thereby optimising your processes and ensuring higher productivity, profitability and safety. Ask for our solutions catalogue or read about how our customers benefit from our tailor-made solutions on our website: [www.tente.com/solutions](http://www.tente.com/solutions)

## SAVE DEVELOPMENT TIME

On our website you will find technical drawings, product data sheets and 2D and 3D CAD files in various formats: [www.tente.com/integral\\_twin](http://www.tente.com/integral_twin)


## GET MORE INFORMATION

In addition to our informative website, you can easily download various catalogues and brochures on mobility solutions, customer references, and much more: [www.tente.com/download](http://www.tente.com/download)



ER LIFE.

ETP

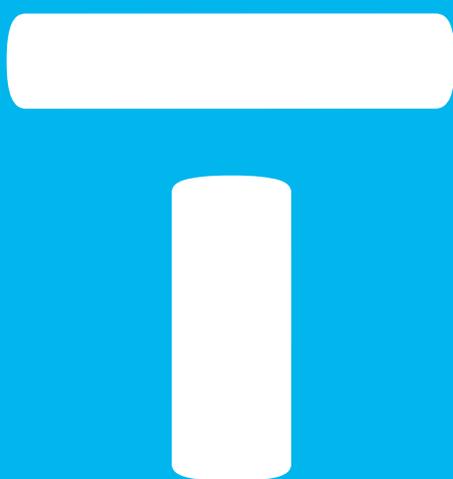

[www.tente.com](http://www.tente.com)



PRODUCTIVITY



SAFETY



DESIGN



DURABILITY



ENVIRONMENT